


STORM SPECIFICATIONS

MANDAKO

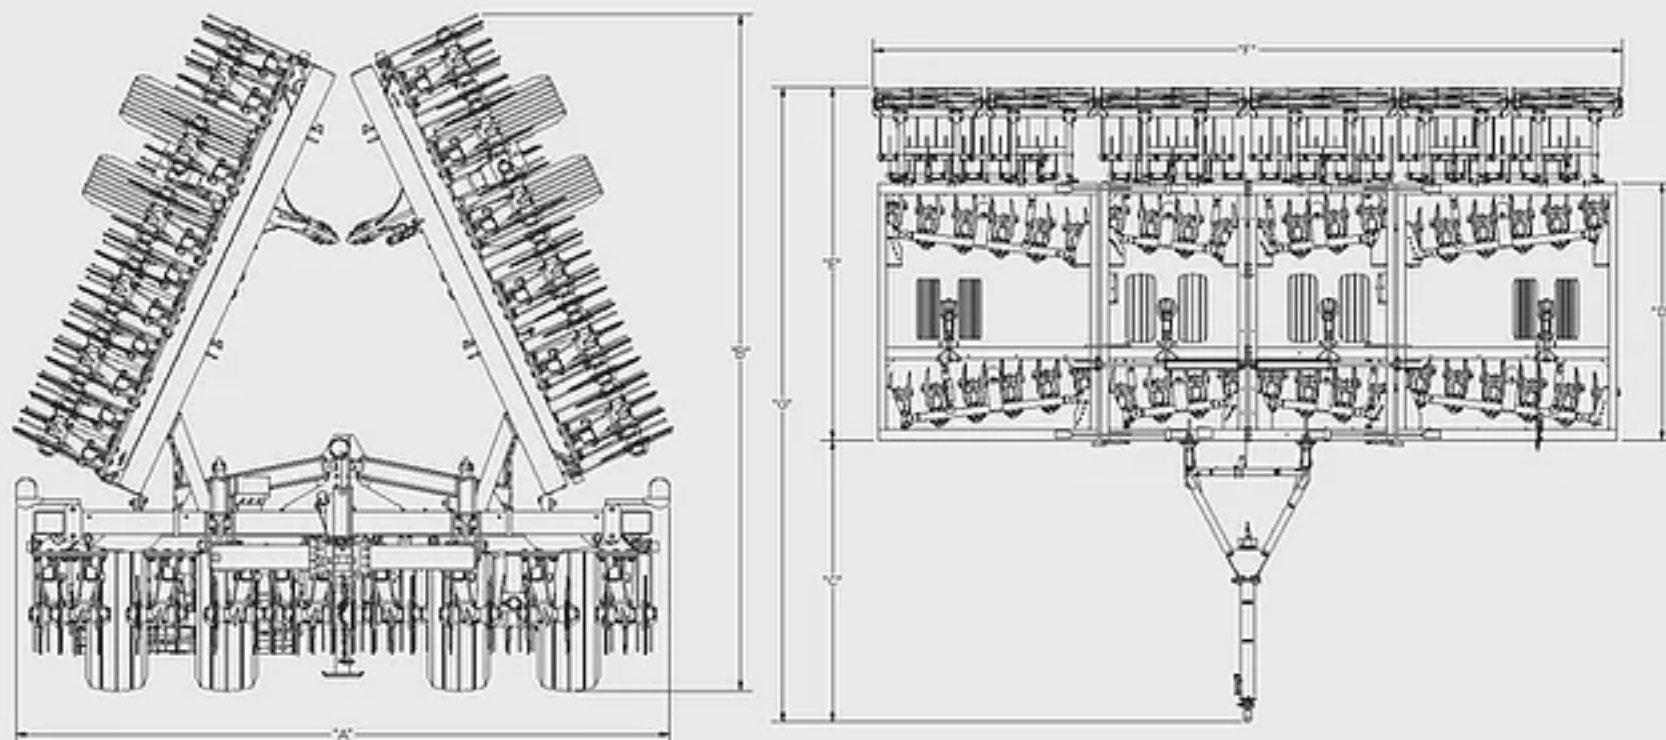

Dimension	Unit Size		
	27'	33'	40'
Frame Sections	3	3	3
Transport Width (A)	14'-0"	14'-0"	20'-11"
Transport Height (B)	11'-5"	14'-4"	14'-4"
Hitch Length (C)	12'-7"	12'-7"	12'-7"
Blade Working Length (D)	11'-6"	11'-6"	11'-6"
Complete Working Length (E)	15'-10"	15'-10"	15'-10"
Working Width (F)	26'-7"	33'-6"	40'
Transport Length (G)	28'-5"	28'-5"	28'-5"
Depth Capabilities	1"-6"	1"-6"	1"-6"
Angle Adjustability	0°-14°	0°-14°	0°-14°
Coulter Blade Spacing	10"	10"	10"
Effective Cut Spacing	5"	5"	5"
Tine Spacing (2-row)	5"	5"	5"
Hyd. Req. (@1800PSI)	10 GPM (38 LPM)	10 GPM (38 LPM)	10 GPM (38 LPM)
Hyd. Req. (Ports)	4	4	4
Horsepower Req.	405+	495+	600+
Tire Size	440/55R18 12.5 L	440/55R18 12.5 L	440/55R18 12.5 L