

# Truflex

LAND ROLLERS

1128 B Cormorant Ave, Detroit Lakes, MN 56501  
701-360-3544 info@sprayflexsprayers.com



**Working Widths:**  
**3 Section: 45', 50' - 5 Section: 60' - 7 Section: 85'**  
\*We can build all sizes\*

Floating Hitch - On all Models



Tru Roller Overlap




Hydraulic Wing Steer




3" Replaceable Shaft



Inside of End Caps of Roller

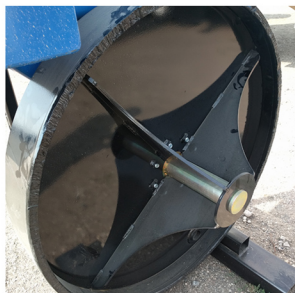

Heavy Duty Hinge and Wing Lock

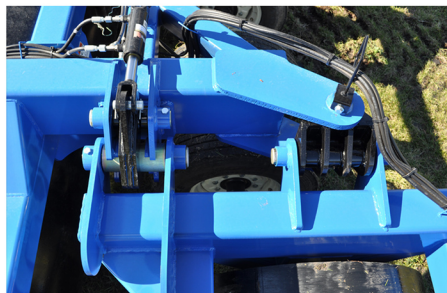

## Roller Features:

- 42" Roller Diameter
- 5/8" or 3/4" Roller Wall Thickness
- 3" Roller Shaft and Bearings
- Replaceable Roller Shaft
- 6"x6" Frame Tubing
- 10 & 14 Ply Trailer Tires
- Hydraulic Wing Lock with 2-1/2" Pin
- Transport Width of 12'
- Hydraulic Floating Hitch
- Tru Roller Overlap

[www.truflexroller.com](http://www.truflexroller.com)

<b>Working Width</b>	32'	45'	50'	60'	86'
<b>Wing Configuration</b>	11'5", 10, 11'5"	17'11", 10', 17'11"	20'5", 10', 20'5"	(4)=13'2" (1)=10'	(6)=12'7" (1)=14'4"
<b>Transport Width</b>	12'	12'	12'	18'	18'
<b>Transport Length</b>	36'4"	42'10"	45'4"	50'9"	66'2"
<b>Number of Rollers</b>	3	3	3	5	7
<b>Roller Diameter</b>	42"	42"	42"	42"	42"
<b>Roller Shaft and Bearing Size</b>	3"	3"	3"	3"	3"
<b>Roller Wall Thickness</b>	5/8" or 3/4"	5/8" or 3/4"	5/8" or 3/4"	5/8" or 3/4"	5/8" or 3/4"
<b>Estimated Roller Weight</b>	21250 (3/4")	26150 (3/4")	28200 (3/4")	38350 (3/4")	53750 (3/4")
<b>Estimated Weight per Foot</b>	664	581	564	640	625
<b>*Minimum Tractor HP</b>	120	150	160	180	280
<b>*Minimum Tractor Weight</b>	12,000 lbs	18,000 lbs	20,000 lbs	24,000 lbs	42,000 lbs
<b>Transport Wheels/Tires (Center)</b>	(4) ST235/85R16 (14 Ply)	(4) ST235/85R16 (14 Ply)	(4) ST235/85R16 (14 Ply)	(4) ST235/85R16 (14 Ply)	(6) ST235/85R16 (14 Ply)
<b>Transport Wheels/Tires (Wings)</b>	(4) ST235/85R16 (10 Ply)	(4) ST235/85R16 (10 Ply)	(4) ST235/85R16 (10 Ply)	(8) ST235/85R16 (14 Ply)	(12) ST235/85R16 (14 Ply)

\*Tractor weight and Horsepower are both factors in operating a Land Roller Safely

